


RAGING KUSH 600

HORTICULTURE
LED LIGHT

The **RAGING KUSH** was designed specifically for flowering in vertical farming. Utilizing Scynce's patented optics for incredible canopy penetration, the **RK** was engineered to meet the needs of large horticulture operations. Whether your need is for intensity & scheduling control, high humidity and frequently cleaned environments or maximizing limited space, the **RK** is a scalable solution to meet your growing needs.

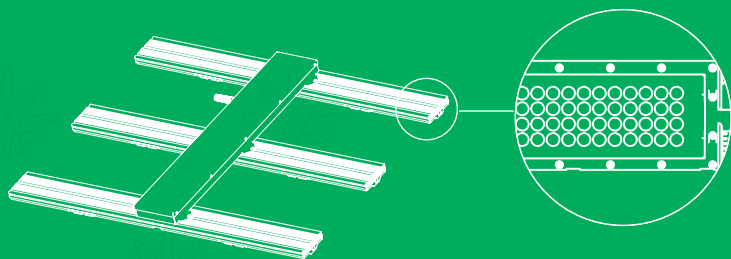

 **SCYNCELED**

POWER: 600w (over clock to 700w)

INPUT VOLTAGE: 100 - 277V

AMPS: 120v-5 / 208v-2.9 / 277v-2.2

DIMENSIONS: 44" x 34.5" x 3.75"

WEIGHT: 42 lbs

WATERPROOF SEALING: IP66 Rating (entire light fixture)

THERMAL MANAGEMENT: Passive with Auto Roll-Back

CERTIFICATIONS: UL, FCC, RoHS, CSA

WARRANTY: 5 years

SPECTRUM: Full spectrum white (cool & warm) with 660nm & 720nm red

PHYSICAL FOOT PRINT: 16 sq. ft. (ideal for verticle farming)

SECONDARY OPTICS: patented 120° lenses





DIMMING: full digital control of recipes and scheduling

FLUX (PPF): 1449 $\mu\text{mol/s}$ (at 600W), 1621 $\mu\text{mol/s}$ (at 700W)

EFFICACY: 2.42 $\mu\text{mol/j}$

COVERAGE AREA: Flower = 4'x4'

* Detailed PAR maps available at: www.scynceled.com

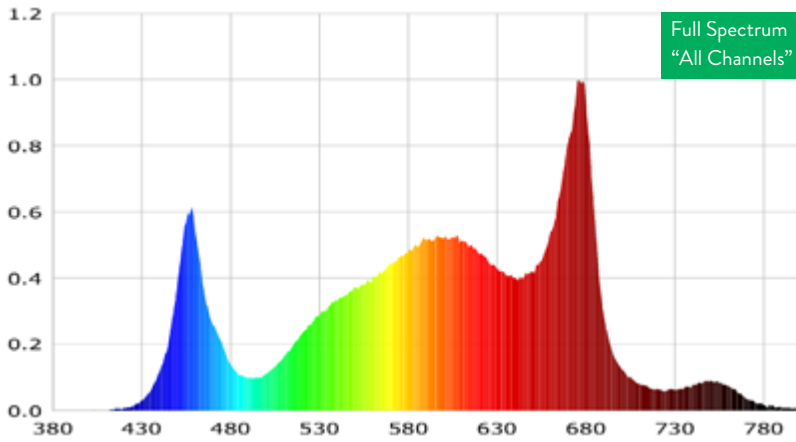

SPECTRUM

The Raging Kush has 3 channels of LEDs: cool white, warm white and a blend of 660nm and 720nm red.

CONTROL

Connect wirelessly to gain complete control over the scheduling and spectrum. Dial in the exact recipe of light your plants need with Theia, our mobile app.

OPTICS


Our patented optics allow plants to see equal intensity light from all angles (similar to natural light), resulting in a larger growing surface with more density below the canopy. Optically focused light prevents hot or burned spots & minimizes off grid collateral light loss.

SECONDARY OPTICS

The 120 degree optic is the ideal choice for vertical and indoor applications where the lights need to be mounted at a height between 6” and 36”, providing an equal distribution of light over the canopy.

The 70 degree optic was designed for greenhouses (perfect as a supplemental light source) and indoor applications where the lights need to be mounted at heights between 4’ up to 14’ over the canopy.

LIGHT DISTRIBUTION CURVE

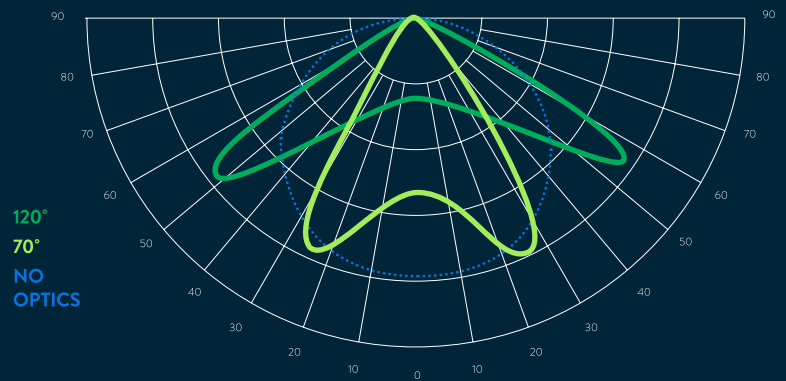

CONTROLS



FEATURES

- Mobile App Interfaces
- Wirelessly to a Single Light
- Group control lights via Mesh

FUNCTIONS

- Intensity / Dim to Zero
- Ramp on Time (sunset/sunrise)
- Time on and off / Scheduling
- Custom Light Recipes

Scan to visit this page @ scynceled.com

RAGING KUSH 600

